



Assembly Instructions

Adjustment of control shaft for
vehicles with engine type code
CAX*

Assembly instructions
Adjustment of control shaft
Engine type code CAX*




1. Scope of delivery

Please check if delivery is complete before starting the installation. In case the delivery is incomplete, please contact our service team at ABT Sportsline.




- 2 Spacers
- 2 Screws M8
- 2 Flat washers M8
- 2 Spring rings M8

2. Assembly

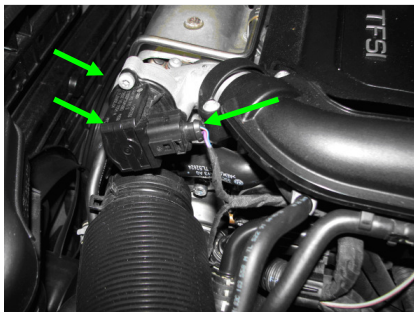


Remove air-filter housing and air ducts. Unscrew the screws of the diverter valve.

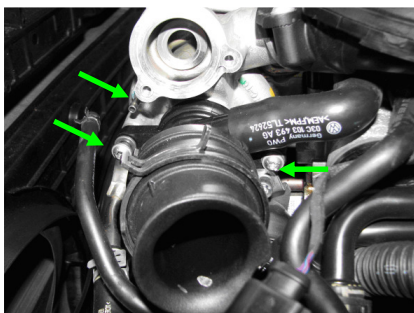


Loosen the marked screws and remove the intake hose.

Assembly instructions
Adjustment of control shaft
Engine type code CAX*

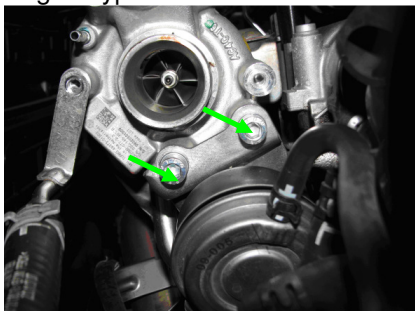

Unscrew both screws of the pressure sensor.

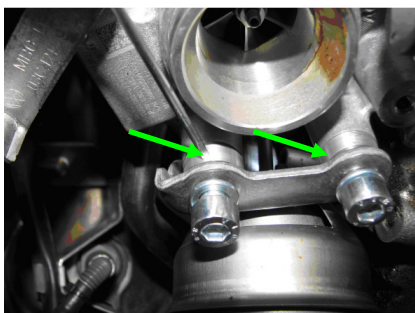

Attach the pressure sensor by means of the provided screws and spacers.
Reattach the rest of the parts.

Assembly instructions
Adjustment of control shaft
Engine type code CAX*



Abt Sportsline GmbH
Johann-Abt-Str. 2
D-87437 Kempten / Allgäu
Tel.: +49 (0)831 / 5 71 40-0
Fax: +49 (0)831 / 7 26 66
info@abt-sportsline.de
www.abt-sportsline.de